

# GEDO CE 2.0:

## TRIMBLE GEDO SCAN SYSTEM

### KEY FEATURES

Simple, self-contained trolley used for Trimble GEDO Scan and other track measuring applications

Helical scanning mode captures ceilings and walls to produce accurate 3D models of tunnels and overpasses

GEDO Scan Field software runs on the Trimble Tablet rugged PC controller. The software controls scanning operations and data collection from the scanner and trolley

Modular system lets you use the Trimble TX5 scanner for other survey and facility needs

Workflow and user interface are consistent with other GEDO systems to reduce training and increase system productivity

### THE TRIMBLE GEDO SOLUTION

Trimble GEDO is an integrated suite of tools for measurement, recording, analysis and applications for railway track location, design, construction and maintenance. Specially tailored for railway tasks and processes, Trimble GEDO hardware and software streamline work in both the field and office. The system uses standard techniques and data formats to share information with leading applications for railway track design and maintenance.

### THE TRIMBLE GEDO SCAN SYSTEM

The Trimble GEDO Scan system utilizes a Trimble TX5 laser scanner to collect high-resolution datasets of 3-dimensional points. The scanner is mounted on a GEDO trolley, which collects location, gauge and cant information as it is moved along the track. The combined data produce detailed 3D models of tunnels, overpasses, stations and other facilities where precise information is needed for railcar clearance and asset management.

The Trimble GEDO Scan Office software combines data from the GEDO Scan and Rec field operations to produce a 3D point cloud. These 3D data can be shared with Trimble RealWorks and other design systems.

Trimble GEDO Scan can operate in two modes. The Local mode for track clearance analysis captures information based on the offset from the rail to nearby objects.

In Absolute mode, the system can create 3D point clouds and tie objects to the rail as well as defined coordinate systems.

For railway specific 3D visualization and analysis, Trimble GEDO Scan Office uses clearance envelopes and 3D models to simulate the movement of a railcar through an existing facility or stretch of track. The system can automatically detect locations where clearance encroachments may occur. For detailed analysis, Trimble GEDO Scan Office can create cross section drawings and compare differences according to given profiles or envelopes.

### APPLICATIONS FOR THE TRIMBLE GEDO SCAN SYSTEM

#### Design



- Document existing conditions with high resolution.
- Analyze potential clearance encroachments against existing and design profiles.
- Create clearance databases to optimize design processes.

#### Construction

- 3D scanning to support construction processes.
- Post-construction check for track clearance.

#### Operations and Maintenance

- Clearance and conflict testing.
- Support a track clearance database for international and heavy-load operations.

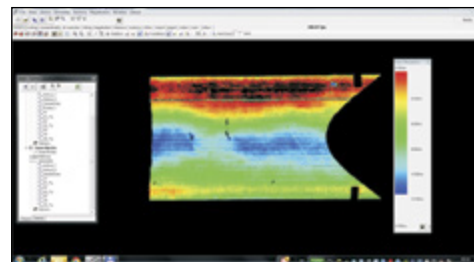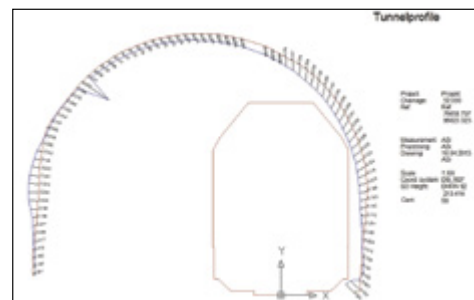

## GENERAL

Applications . . . . . Documentation of existing track and nearby objects;  
 Design analysis for upgrades and retrofits;  
 3D modeling;  
 Clearance encroachment analysis;  
 Construction quality control;  
 Clearance database management

## TRIMBLE GEDO SCAN SYSTEM

Relative Accuracy . . . . . <5 mm at 7 m  
 Absolute Accuracy (depending on track survey) . . . . . typ. <20 mm at 7 m  
 Weight (Trolley, Scanner, Controller) . . . . . 27.2 kg



## TRIMBLE GEDO CE 2.0 TRACK MEASURING TROLLEY

Description . . . . . Track-mounted trolley  
 Supports Trimble GNSS, S-Series Total Stations, TX5 Scanner  
 Gauge . . . . . 1000 mm, 1067 mm, 1435 mm, 1520 mm, 1600 mm, 1668 mm,  
 1676 mm , other gauges on request  
 Gauge Measurement  
 Range . . . . . -20 mm to +60 mm  
 Accuracy . . . . . ±0.3 mm  
 Cant Measurement  
 Range . . . . . ±10° or ±265 mm  
 Accuracy . . . . . ±0.5 mm (static)  
 Weight . . . . . 16.8 kg  
 Power . . . . . Self-contained, in-field replaceable  
 Battery Typ . . . . . Trimble S-Series Li-Ion, rechargeable  
 Life . . . . . 6 - 8 hours

## TRIMBLE TABLET RUGGED PC CONTROLLER

Operating System . . . . . Genuine Windows® 7 Professional  
 Display . . . . . 7 inch color sunlight readable touch screen  
 Memory . . . . . 1 GB DRAM, expandable via SDIO memory card  
 Storage . . . . . 80 GB solid state hard drive  
 Interfaces . . . . . USB 2.0, RS232, Bluetooth® 2.1, WiFi (802.11b/g)  
 Camera . . . . . 2Mpx front-facing autofocus video and photo  
 Environmental Protection . . . . . IP67; MIL-STD-810F  
 Temperature Range . . . . . -30 °C to +60 °C operating range  
 Weight . . . . . 1.4 kg

## TRIMBLE TX5 3D LASER SCANNER

Scanning Range . . . . . 0.6 m to 120 m  
 Indoor or outdoor with low ambient light  
 and normal incident to a 90% reflective surface  
 Scanning Speed . . . . . Up to 976,000 points per second, selectable  
 Ranging Error . . . . . ±2 mm at 10 m and 25 m,  
 each at 90% and 10% reflectivity  
 Battery Life . . . . . Up to 5 hours

© 2013, Trimble Navigation Limited. All rights reserved. Trimble and the Globe and Triangle logo are trademarks of Trimble Navigation Limited registered in the United States and in other countries. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. All other trademarks are the property of their respective owners. PN 022543-569 (04/13)

Specifications subject to change without notice.

TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

### NORTH AMERICA

Trimble Navigation Limited  
 10368 Westmoor Dr  
 Westminster CO 80021  
 USA

### EUROPE

Trimble Germany GmbH  
 Am Prime Parc 11  
 65479 Raunheim  
 GERMANY

### ASIA-PACIFIC

Trimble Navigation  
 Singapore Pty Limited  
 80 Marine Parade Road  
 #22-06, Parkway Parade  
 Singapore 449269  
 SINGAPORE

